

FFP2

iNNovAir 82135™

EN1827:1999+A1:2009

Particulate respirator: 10 units/box, 12 box/case

Filter: 20 units/box, 12 box/case

#82135 iNNovAir Particulate respirator

#72135 Replacement filter for 82135

- Triangular, reusable mesh type
- Filters 94% of airborne particles with 8% leakage only

Suggested Applications for iNNovAir:

- | | | | |
|-------------------|-----------------|-----------|-------------------------|
| • Groundwork | • Concrete dust | • Sanding | • Oxy-Acetylene cutting |
| • Demolition | • Woodworking | • Tiling | • Sweeping & other |
| • Tunneling | • Plastering | • Bagging | dusty operations |
| • Cement handling | • Grinding | • Buffing | |

FITTING INSTRUCTIONS: iNNovAir




Hold respirator in your hand as shown, with the nosepiece at your fingertips & the headbands hanging freely below your hand.



Place respirator under your chin with the nosepiece up.




Pull the top headband to top back of head above the ears.



Pull the bottom headband hook and lock behind the head, below the ears. Adjust the strap length to optimum comfort.

FILTER REPLACEMENT INSTRUCTIONS: iNNovAir 82105, 82115 & 82135

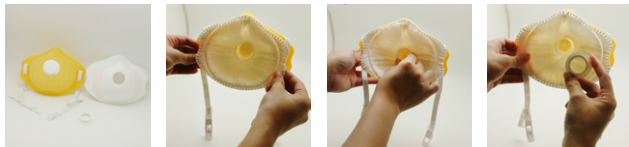

1. Part A. Mask Body {(Mask Mesh with Valve and Head strap) 82105, 82115 & 82135 }
Part B. Replacement filter/s {72105, 72115 & 72135 (Only the filter can be replaced) }
Part C. Valve cap
2. Place the filter (part B) onto the mask mesh (part A).
3. Place the valve cap (part C) on to the exhalation valve base.
4. Working clockwise with valve cap and screw onto the exhalation valve base tightly.

NEW!